

Referans Nr.	dx	x L	b	a	e	k	(g)
1590-1010040	M10x10	x40	23	9.7	15	6	35
1590-1010063		x63	45				45
1590-1010080		x80	50				60
1590-1010100		x100	60				70
1590-1012050	M10x12	x50	35	11.7	18	7	50
1590-1012063		x63	40				60
1590-1012080		x80	55				65
1590-1012100		x100	60				75
1590-1012125		x125	75				90
1590-1012160		x160	90				105
1590-1012200		x200	120				120
1590-1212050	M12x12	x50	35	11.7	18	7	65
1590-1212063		x63	40				70
1590-1212080		x80	55				80
1590-1212100		x100	65				100
1590-1212125		x125	75				110
1590-1212160		x160	100				140
1590-1212200		x200	120				160
1590-1214050	M12x14	x50	35	13.7	22	8	80
1590-1214063		x63	45				90
1590-1214080		x80	55				100
1590-1214100		x100	65				110
1590-1214125		x125	75				135
1590-1214160		x160	100				160
1590-1214200		x200	120				180
1590-1416063	M14x16	x63	45	15.7	25	9	115
1590-1416080		x80	55				140
1590-1416100		x100	65				160
1590-1416125		x125	75				180
1590-1416160		x160	100				220
1590-1416200		x200	120				255
1590-1416250		x250	150				300
1590-1616063	M16x16	x63	45	15.7	25	9	140
1590-1616080		x80	55				160
1590-1616100		x100	65				190
1590-1616125		x125	85				225
1590-1616160		x160	100				270
1590-1616200		x200	120				315
1590-1616250		x250	150				380
1590-1618063	M16x18	x63	45	17.7	28	10	170
1590-1618080		x80	55				185
1590-1618100		x100	65				220
1590-1618125		x125	85				245
1590-1618160		x160	100				295
1590-1618200		x200	120				340
1590-1618250		x250	150				405
1590-1820080	M18x20	x80	55	19.7	32	12	260
1590-1820100		x100	65				290
1590-1820125		x125	85				340
1590-1820160		x160	110				390
1590-1820200		x200	125				455
1590-1820250		x250	150				535
1590-1820315		x315	190				650
1590-2020080	M20x20	x80	55	19.7	32	12	300
1590-2020100		x100	65				330
1590-2020125		x125	85				380
1590-2020160		x160	110				450
1590-2020200		x200	125				535
1590-2020250		x250	160				635
1590-2020315		x315	190				760
1590-2022080	M20x22	x80	55	21.7	35	14	345
1590-2022100		x100	65				380
1590-2022125		x125	85				435
1590-2022160		x160	110				500
1590-2022200		x200	125				590
1590-2022250		x250	150				695
1590-2022315		x315	190				820
1590-2224080	M22x24	x80	55	23.7	40	16	465
1590-2224100		x100	65				515
1590-2224125		x125	85				580
1590-2224160		x160	110				660
1590-2224200		x200	125				775
1590-2224250		x250	150				805
1590-2224315		x315	190				1050


Referans Nr.	dx	x L	b	a	e	k	(g)
1590-2424100	M24x24	x100	70	23.7	40	16	550
1590-2424125		x125	85				630
1590-2424160		x160	110				725
1590-2424200		x200	125				850
1590-2424250		x250	150				990
1590-2424315		x315	190				1180
1590-2424400		x400	240				1410
1590-2428100	M24x28	x100	70	27.7	44	18	660
1590-2428125		x125	85				730
1590-2428160		x160	110				820
1590-2428200		x200	125				950
1590-2428250		x250	150				1090
1590-2428315		x315	190				1300
1590-2428400		x400	240				1530
1590-2428500		x500	290				1800
1590-3036125	M30x36	x125	80	35.6	54	22	1280
1590-3036160		x160	110				1440
1590-3036200		x200	135				1620
1590-3036250		x250	150				1880
1590-3036315	M36x42	x315	200	41.6	65	26	2150
1590-3036500		x500	300				3010
1590-3642160		x160	100				2260
1590-3642250		x250	175				2890
1590-3642400	M36x42	x400	250	41.6	65	26	4010
1590-3642600		x600	340				5900
1590-4248160	M42x48	x160	100	47.6	75	30	3550
1590-4248250		x250	175				4530
1590-4248400		x400	250				6160

DIN 787
Ürün Nr. 1590 “T” Ayaklı Saplama

- Malzeme: 42 CrMo 4 DIN
- Kalite 12.9
- Siyah kaplama

Product Nr. 1590 T-Slot Bolt

- Material: 42 CrMo 4 DIN
- Quality 12.9
- Black coating

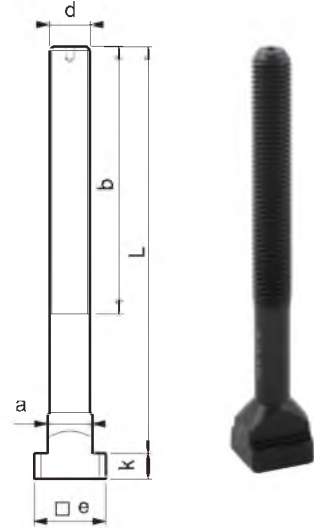

Not: 180 °C üzerindeki ısıya mukavim ortamdaki çalışmalarda firmamız ile irtibata geçiniz.

Note: Please contact with our company at work temperatures above 180 °C.

