

| Referans Nr. | d x L | b1 | b | (g) |
|--------------|-------|-----|-----|------|
| 1690-08040 | x40 | | 20 | 10 |
| 1690-08063 | x63 | | 40 | 15 |
| 1690-08080 | x80 | | 50 | 20 |
| 1690-08100 | x100 | M8 | 63 | 30 |
| 1690-08125 | x125 | | 75 | 35 |
| 1690-08160 | x160 | | 100 | 45 |
| 1690-10050 | x50 | | 25 | 20 |
| 1690-10063 | x63 | | 32 | 25 |
| 1690-10080 | x80 | | 50 | 35 |
| 1690-10100 | x100 | M10 | 63 | 45 |
| 1690-10125 | x125 | | 75 | 55 |
| 1690-10160 | x160 | | 100 | 70 |
| 1690-10200 | x200 | | 125 | 95 |
| 1690-12050 | x50 | | 25 | 35 |
| 1690-12063 | x63 | | 32 | 40 |
| 1690-12080 | x80 | | 50 | 55 |
| 1690-12100 | x100 | M12 | 63 | 70 |
| 1690-12125 | x125 | | 75 | 90 |
| 1690-12160 | x160 | | 100 | 115 |
| 1690-12200 | x200 | | 125 | 140 |
| 1690-14063 | x63 | | 32 | 60 |
| 1690-14080 | x80 | | 50 | 75 |
| 1690-14100 | x100 | | 63 | 95 |
| 1690-14125 | x125 | M14 | 75 | 120 |
| 1690-14160 | x160 | | 100 | 150 |
| 1690-14200 | x200 | | 125 | 195 |
| 1690-14250 | x250 | | 160 | 240 |
| 1690-16063 | x63 | | 32 | 85 |
| 1690-16080 | x80 | | 50 | 105 |
| 1690-16100 | x100 | | 63 | 130 |
| 1690-16125 | x125 | | 75 | 160 |
| 1690-16160 | x160 | M16 | 100 | 205 |
| 1690-16200 | x200 | | 125 | 260 |
| 1690-16250 | x250 | | 160 | 325 |
| 1690-16315 | x315 | | 180 | 405 |
| 1690-16500 | x500 | | 315 | 650 |
| 1690-18080 | x80 | | 50 | 130 |
| 1690-18100 | x100 | | 60 | 160 |
| 1690-18125 | x125 | | 75 | 200 |
| 1690-18160 | x160 | M18 | 100 | 260 |
| 1690-18200 | x200 | | 125 | 320 |
| 1690-18250 | x250 | | 150 | 400 |
| 1690-18315 | x315 | | 180 | 510 |
| 1690-20080 | x80 | | 32 | 155 |
| 1690-20100 | x100 | | 60 | 200 |
| 1690-20125 | x125 | | 70 | 250 |
| 1690-20160 | x160 | | 100 | 330 |
| 1690-20200 | x200 | M20 | 125 | 400 |
| 1690-20250 | x250 | | 160 | 510 |
| 1690-20315 | x315 | | 200 | 640 |
| 1690-20400 | x400 | | 250 | 815 |
| 1690-20500 | x500 | | 315 | 1020 |
| 1690-22100 | x100 | | 45 | 250 |
| 1690-22125 | x125 | | 70 | 305 |
| 1690-22160 | x160 | | 100 | 400 |
| 1690-22200 | x200 | M22 | 125 | 500 |
| 1690-22250 | x250 | | 160 | 620 |
| 1690-22315 | x315 | | 180 | 780 |
| 1690-22400 | x400 | | 250 | 1010 |
| 1690-24100 | x100 | | 45 | 290 |
| 1690-24125 | x125 | | 70 | 365 |
| 1690-24160 | x160 | | 100 | 470 |
| 1690-24200 | x200 | | 125 | 580 |
| 1690-24250 | x250 | M24 | 160 | 730 |
| 1690-24315 | x315 | | 200 | 920 |
| 1690-24400 | x400 | | 250 | 1170 |
| 1690-24500 | x500 | | 315 | 1470 |
| 1690-24630 | x630 | | 315 | 1860 |
| 1690-30125 | x125 | | 56 | 570 |
| 1690-30200 | x200 | | 125 | 910 |
| 1690-30250 | x250 | | 160 | 1150 |
| 1690-30315 | x315 | M30 | 200 | 1435 |
| 1690-30500 | x500 | | 315 | 2315 |
| 1690-30700 | x700 | | 400 | 3215 |
| 1690-301000 | x1000 | | 400 | 4700 |


| Referans Nr. | d x L | b1 | b | (g) |
|--------------|-------|-----|-----|------|
| 1690-36160 | x160 | | 80 | 1100 |
| 1690-36200 | x200 | | 125 | 1340 |
| 1690-36250 | x250 | | 160 | 1710 |
| 1690-36315 | x315 | M36 | 200 | 2150 |
| 1690-36400 | x400 | | 250 | 2700 |
| 1690-36500 | x500 | | 315 | 3450 |
| 1690-36700 | x700 | | 400 | 4750 |
| 1690-42315 | x315 | | 200 | 2950 |
| 1690-42400 | x400 | M42 | 250 | 3750 |
| 1690-42500 | x500 | | 315 | 4690 |

DIN 6379
Ürün Nr. 1690 Düz Saplama

- Malzeme: 41Cr 4 DIN
- Kalite 10.9
- Siyah kaplama

Product Nr. 1690 Straight Stud

- Material: 41Cr 4 DIN
- Quality 10.9
- Black coating

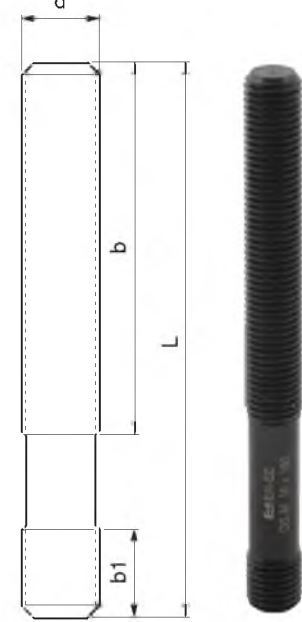

Not: 180 °C üzerindeki ısıya mukavim ortamdaki çalışmalarda firmamız ile irtibata geçiniz.

Note: Please contact with our company at work temperatures above 180 °C.