

Referans Nr.	A	B	C	D	E	F	G	H	J	K	L	M	N
2077-08001	44	32	20	8	28.5	4	26.5	23	7	15	19	10	M8x1.25
2077-10001	54	40	25	10	35	5	33	29	9	16	24	12	M10x1.5
2077-12001	62	46	30	12	39.5	5.5	37.5	35	11	17	27	14	M12x1.75

Referans Nr.	P	Sıkma Kuvveti Clamping Force Kgf	Tork Değeri Allowable Screw Torque (N-m)	(g)
2077-08001	6	350	45	160
2077-10001	8	550	55	310
2077-12001	10	700	70	490




Ürün Nr. 2077 Yandan Bağlama

- Malzeme: 42 CrMo 4 DIN
- Sertlik: 38-42 HRC
- Siyah Kaplama



Product Nr. 2077 Side Clamps

- Material: 42 CrMo 4 DIN
- Hardness: 38-42 HRC
- Black Coating

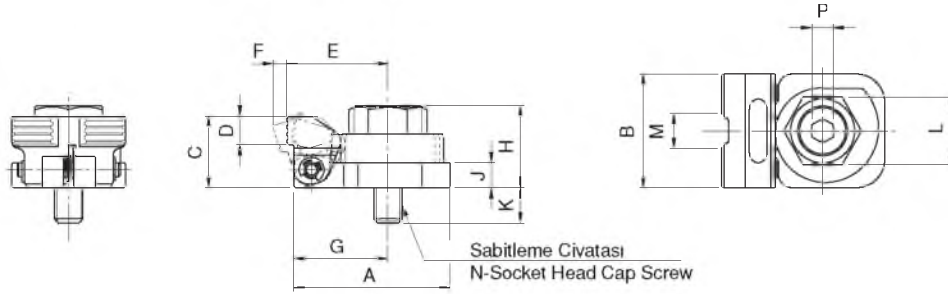

Kullanım Şekli / How To Use

- Önce parçayı sabitleyip sonra anahtar ile sıkma işlemi yapılır.
- Secure the body and the flanged collar with a socket head cap screw, and then turn the the cam with a wrench to clamp a workpiece.

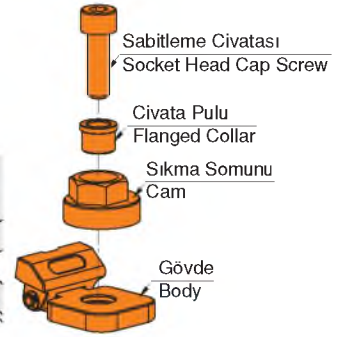

Yandan Bağlama

Side Clamps

Referans Nr.	a	A	H	L	Sıkma Kuvveti Clamping Force Kgf	(g)
2080-01428	14 - 16 - 18 - 20 - 22 - 24 - 28	61	57	110	3000	1850

Ürün Nr. 2080 Yandan Bağlama

- Vida kaldırması ile dikey ve yatay sıkma kuvveti sağlamakta.

Gövde

- Malzeme: GGG 60 DIN
- Statik Boya

Çene

- Malzeme: Ck45 DIN
- Sertlik: 28-32 HRC

Product Nr. 2080 Side Clamps

- Vertical down thrust and horizontal clamping force available simultaneously with the operation of leverage screw

Body

- Material: GGG 60 DIN
- Statical Painting

Jaw

- Material: Ck45 DIN
- Hardness: 28-32 HRC

