

| Referans Nr. | a  | c   | b  | k1 | k2 | k3 | k4 | L  | h  | h1 | d   | d1  | sıkma kuvveti<br>clamping force<br>Kgf | (g)  |
|--------------|----|-----|----|----|----|----|----|----|----|----|-----|-----|--|------|
| 2090-14      | 14 | 3.5 | 30 | 95 | 99 | 26 | 26 | 65 | 28 | 10 | M12 | M12 | 3500                                   | 7925 |
| 2090-16      | 16 |     |    |    |    |    |    |    |    |    |     |     |  | 8490 |
| 2090-18      | 18 |     |    |    |    |    |    |    |    |    |     |     |  | 4610 |
| 2090-20      | 20 |     |    |    |    |    |    |    |    |    |     |     |  | 8850 |
| 2090-22      | 22 |     |    |    |    |    |    |    |    |    |     |     |  | 9030 |
| 2090-24      | 24 |     |    |    |    |    |    |    |    |    |     |     |  | 9490 |
| 2090-28      | 28 |     |    |    |    |    |    |    |    |    |     |     |  | 9800 |











#### Ürün Nr. 2090 Kollu Yandan Bağlama Set


- Ürünün eksantrik çalışma sistemi saat yönünde sıkıldığında iş parçasını dayama ve pleyt yönüne özel dizayn anahtarı ile yüksek kuvvette sıkar.
- 1-Kollu yandan sıkma pabucun eksantrik hareketi 3.5 mm'dir.
- 2-Ürün iş parçasına 1.5 - 2 mm yakınlaştırılır.
- 3-10 mm alyan ile imbus civataları sabitlenir.
- 4-Ürünü anahtarı ile saat yönünde çevirerek iş parçasını sabitleme işlemi gerçekleştirilir.
- DIN 650 "T" kanala uyumludur
- Malzeme 42 CrMo 4 DIN
- Sertlik 48-50 HRC
- Siyah kaplama
- Plastik kutuda set

#### Product Nr. 2090 Armed Side Press Set

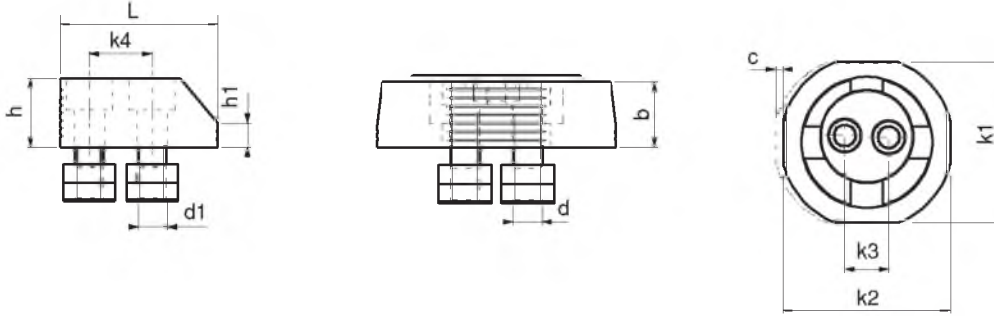- When the eccentric working system of the product is tightened clockwise, it clamps the work piece with high force in the direction of resting and plate with it's special designed wrench.
- 1-Eccentric movement of Armed Side Clamp 3.5 mm.
- 2-It brings the product 1.5 - 2mm close to the work piece
- 3-imbus bolts are fixed with 10mm allen.
- 4-Fixing of the work piece is implemented by turning the product clockwise with the wrench.
- It is in compliance with DIN 650 "T" Slot
- Material: 42 CrMo 4 DIN
- Hardness: 48-50 HRC
- Black coating
- Set is in the plastic box



| Set İçindekiler / The set consists of |   |   |   |   |   |   |  |
|---------------------------------------|---|---|---|---|---|---|--|
| Parça<br>Part                         |  |  |  |  |  |  |  |
| Adet<br>Quantity                      | 2   | 2   | 1   | 8   | 8   | 1   | 1  |

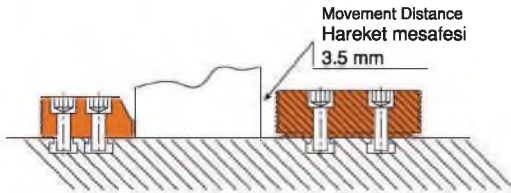

Not: Sabit dayamanın dereceli tarafı ince parçalar, düz tarafı ise kalın parçalarda kullanılmak üzere iki farklı şekilde kullanılabilir.

Note: Fixed rest can be used as two different ways: Graded side is used for thin pieces and the Straight side is used with thick pieces.

