

Referans Nr.	a	b	c	L	d	e	f	h	i	n	s	sıkma kuvveti clamping force kgf	(kg)
2330-127160	127	0-160	60	422	99	78	160	115	125	55	200	3500	28
2330-157200	157	0-200	60	462	99	78	160	115	125	55	200	4500	46
2330-157300	157	0-300	60	562	99	78	160	115	150	55	250	4500	51
2330-197300	197	0-300	60	562	99	78	160	115	150	55	250	4500	66
2330-197400	197	0-400	60	662	99	78	160	115	150	55	350	4500	73
2330-197500	197	0-500	60	762	99	78	160	115	200	55	200/250	4500	80






### Ürün Nr. 2330 Mekanik Çelik Mengene

- Mekanik çelik mengene sertleştirilmiş ve hassas taşlanmış olarak mükemmel kullanıma sahiptir. Kullanım özelliği işlenecek malzemeyi sabitlerken sabit ve hareketli çenelerde bulunan modüler çeneler yağlı sisteminden dolayı malzemeyi mengene tabanına doğru çeker ve güvenli çalışma sağlar. Hareketli yüzeylerin tamamı hassas taşlanmıştır. Kamalı sabitleme özelliğiyle hareketli çene mesafesi hızlı ayarlanabilir, kolay kullanılır.
- Kullanım alanı: CNC ve mekanik frezeler, taşlama ve matkap tezgahları, çeşitli sanayi makineleri
- Malzeme: 21 NiCrMo 2
- Sertlik: 50-52 HRC

### Product Nr. 2330 Mechanical Steel Vice


- Mechanical Steel Vice is hardened and it has excellent way of using because of being sensitively grinded. It's usage characteristic fixes the material to be machined and at the same time it pulls the material to the base of the vice because of having springed system of modular jaws taking place in the moving jaws. Entire moving surface is sensitively grinded. With it's wedged fixing characteristic, moving jaw distance can be adjusted rapidly and can be used with convenience.
- Area of Using: CNC and mechanical milling machines, grinding and drilling machines, various industrial machines
- Material: 21 NiCrMo 2 DIN
- Hardness: 50-52 HRC

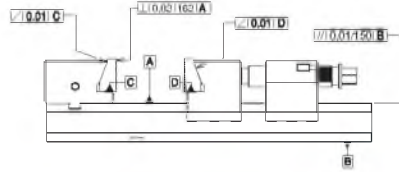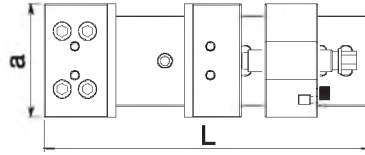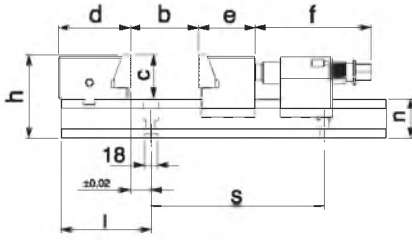

### 2'li Bağlama İçin Ara Vasat Medium Part to Connect Two Work Piece



Referans Nr.	b1	(kg)
2330-127	50	3.1
2330-157	50	3.8
2330-197	50	4.7

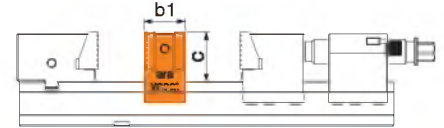


Referans Nr.	a	b	c	e	(g)
2335-127	127	45	7	5	760
2335-157	157	45	7	5	935
2335-197	197	45	7	5	1180

### Ürün Nr. 2335 MÇM Faturalı Çene

### Product Nr. 2335 MCM Jaw with Stopper

- Malzeme: Ck45 DIN
- Material: Ck45 DIN
- Sertlik: 35-38 HRC
- Hardness: 35-38 HRC



Referans Nr.	a	b	c	d	e	f	(g)
2340-127	127	45	7	34	5	5	950
2340-157	157	45	7	34	5	5	1010
2340-197	197	45	7	34	5	5	1290

### Ürün Nr. 2340 MÇM Faturalı Çene

### Product Nr. 2340 MCM Jaw with Stopper

