



$\lambda=30^\circ$   
 $\gamma=12^\circ$

Type  
NR



DIN  
844

ISO  
1641

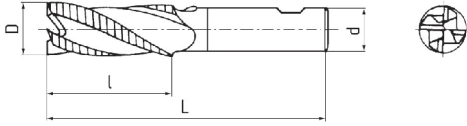

## UZUN KABATALAŞ FREZE DIN 844 NR

ZPS-fn®

ZPS125518

HSSCo8

FİYAT KODU

D	l	L	d h6	Z	FİYAT KODU
6	24	68	6	4	09598
8	38	88	10	4	09599
10	45	95	10	4	09600
12	53	110	12	4	09601
14	53	110	12	4	09602
16	63	123	16	4	09603
18	63	123	16	4	09604
20	75	141	20	4	09605
22	75	141	20	5	09606
24	90	166	25	5	09607
25	90	166	25	5	09608
26	90	166	25	5	09609
28	90	166	25	5	09610
30	90	166	25	5	09611
32	106	186	32	6	09612
36	106	186	32	6	09613
40	125	186	32	6	09614

## TEKNİK ÖZELLİKLERİ:



Düşük ve orta dayanımlı malzemelerin (700 MPa'a kadar) kaba operasyonları için kullanılır. Yüzey kalitesi Ra 12,5 ve daha yüksek.



Yüksek hız çeligi %8 kobaltlı.

## KULLANIM ALANI

- Alaşımsız çelikler (180 HB)
- Yapı çelikleri (Sertlik:24 Hrc)
- Semantasyon nitrürasyon çelikleri (Sertlik:27,1 Hrc)
- Dökme demir (Max.240 HB)
- Korozyona ve asite dayanıklı çelikler (Sertlik:24,8 Hrc)