


ISO VELDON TUTUCULAR

DIN 2080

ISO 2583



DIN 1835-B VELDON CİVATALARI İLE
BİRLİKTE TESLİM EDİLİR.

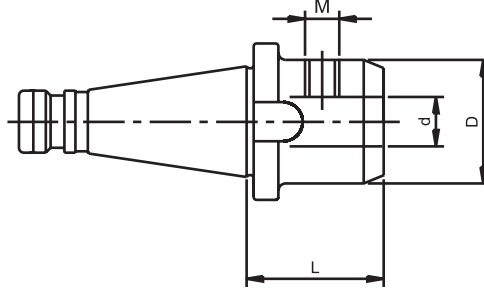

DIN 6359
DIN 1835-B


- MALZEME: 20 Mn Cr5
- SERTLİK: 58 ± 2 HRC
(Derinlik 0,6-0,9 mm)
- AÇI: DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI: MAX. 0,006 mm

SİP. NR.	KONİK	d (mm)	L (mm)	D (mm)	VELDON CİVATASI	CİVATA ADEDİ	FİYAT KODU
ISO40.06.V	ISO 40	6	50	25	M6x10	1	00401
ISO40.08.V	ISO 40	8	50	28	M8x10	1	00402
ISO40.10.V	ISO 40	10	50	35	M10x12	1	00403
ISO40.12.V	ISO 40	12	50	42	M12x16	1	00404
ISO40.14.V	ISO 40	14	50	44	M12x16	1	00405
ISO40.16.V	ISO 40	16	63	48	M14x16	1	00406
ISO40.18.V	ISO 40	18	63	50	M14x16	1	00407
ISO40.20.V	ISO 40	20	63	52	M16x16	1	00408
ISO40.25.V	ISO 40	25	80	64	M18x2x20	2	00409
ISO40.32.V	ISO 40	32	80	72	M20x2x20	2	00410
ISO40.40.V	ISO 40	40	90	80	M20x2x20	2	00411
ISO50.20.V	ISO 50	20	63	52	M16x16	1	00412
ISO50.25.V	ISO 50	25	80	64	M18x2x20	2	00413
ISO50.32.V	ISO 50	32	80	72	M20x2x20	2	00414
ISO50.40.V	ISO 50	40	90	80	M20x2x20	2	00415

ISO REDÜKSİYON - ÇEKTİRME CİVATALI

DIN 2080

ISO 2583

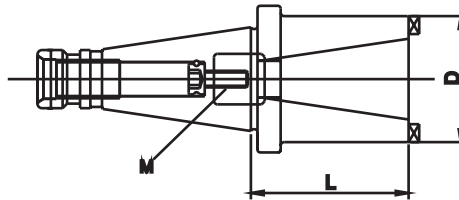

- MALZEME: 20 Mn Cr5
- SERTLİK: 58 ± 2 HRC
(Derinlik 0,6-0,9 mm)
- AÇI: DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI: MAX. 0,006 mm

SİP. NR.	KONİK	İÇ KONİK	L (mm)	D (mm)	M (mm)	FİYAT KODU
ISO40.30	ISO 40	ISO 30	50	50	M12	00416
ISO40.40	ISO 40	ISO 40	100	63	M16	00417
ISO50.40	ISO 50	ISO 40	50	70	M16	00418