


SK KAMALI MORS ADAPTÖRÜ

DIN 69871

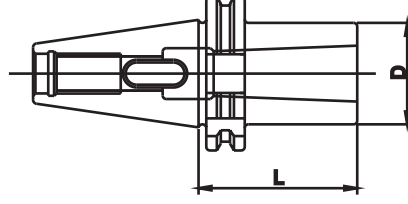


DIN 6383

- MALZEME: 20 Mn Cr5
- SERTLİK: 58 ± 2 HRc (Derinlik 0,6-0,9 mm)
- AÇI: DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI: MAX. 0,006 mm

SİP. NR.	KONİK	İÇ KONİK	D (mm)	L (mm)	FİYAT KODU
SK40.K.MK1	SK40	MK1	25	50	00666
SK40.K.MK2	SK40	MK2	32	50	00667
SK40.K.MK3	SK40	MK3	40	70	00668
SK40.K.MK4	SK40	MK4	48	95	00669
SK50.K.MK3	SK50	MK3	40	65	00670
SK50.K.MK4	SK50	MK4	48	95	00671
SK50.K.MK5	SK50	MK5	63	105	00672

SK ÇEKTİRME CİVATALI MORS ADAPTÖRÜ

DIN 69871

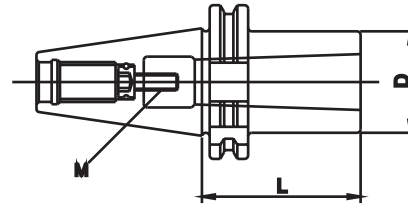

DIN 6364

- MALZEME: 20 Mn Cr5
- SERTLİK: 58 ± 2 HRc (Derinlik 0,6-0,9 mm)
- AÇI: DIN 7178-1/AT3
DIN 2080-1/AT3
- SALGI: MAX. 0,006 mm

SİP. NR.	KONİK	İÇ KONİK	L (mm)	D (mm)	M (mm)	FİYAT KODU
SK40.C.MK1	SK40	MK1	50	25	M6	00673
SK40.C.MK2	SK40	MK2	50	32	M10	00674
SK40.C.MK3	SK40	MK3	70	40	M12	00675
SK40.C.MK4	SK40	MK4	95	63	M16	00676