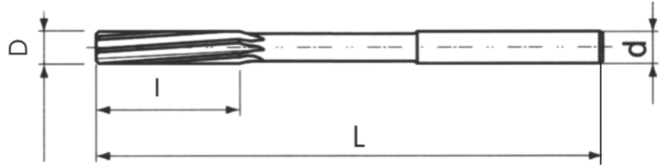



HSS

H7

DIN
212-B

SİLİNDİR SAPLI MAKİNA RAYBASI DIN 212B,HELİS, HSS,H7

				HSS
				IAT212B
D H7 (mm)	L (mm)	l (mm)	d (mm)	FİYAT KODU
2	49	11	2,0	04779
2,5	57	14	2,5	04780
3	61	15	3,0	04781
3,5	70	18	3,5	04782
4	75	19	4,0	04783
4,5	80	21	4,5	04784
5	86	23	5,0	04785
5,5	93	26	5,5	04786
6	93	26	6,0	04787
6,5	101	28	6,5	04788
7	109	31	7,0	04789
8	117	33	8,0	04790
9	125	36	9,0	04791
10	133	38	10,0	04792
11	142	41	10,0	04793
12	151	44	10,0	04794
13	151	44	10,0	04795
14	160	47	12,5	04796
15	162	50	12,5	04797
16	170	52	12,5	04798
17	175	54	14,0	04799
18	182	56	14,0	04800
19	189	58	16,0	04801
20	195	60	16,0	04802
21	215	55	18,0	04803
22	225	55	18,0	04804
23	230	60	18,0	04805
24	240	60	20,0	04806
25	245	60	20,0	04807
26	250	60	20,0	04808
27	260	60	22,0	04809
28	270	65	22,0	04810
29	270	65	22,0	04811
30	280	70	24,0	04812
31	290	75	24,0	04813

KULLANIM ALANI

Kısa ağızlama boyu ve eşit bölümlü olmayan kesme ağızları ile yuvarlak ve toleranslarına uygun raybalama sağlar. Bütün çelik türlerinde, NE- metallerde, sert ve yumuşak plastiklerde, kör delikler için H7 delik toleranslarında raybalama işlemi için kullanılır.