
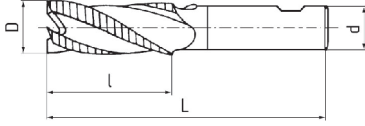


$\lambda=30^\circ$
 $\gamma=12^\circ$
Type
NRDIN
844ISO
1641

KISA KABATALAŞ FREZE DIN 844 NR

ZPS-fm®

ZPS124518

HSSCo8

FİYAT KODU

D	l	L	d h6	Z	FİYAT KODU
6	13	57	6	4	09577
7	16	66	10	4	09578
8	19	69	10	4	09579
9	19	69	10	4	09580
10	22	72	10	4	09581
11	22	79	12	4	09582
12	26	83	12	4	09583
13	26	83	12	4	09584
14	26	83	12	4	09585
15	26	83	12	4	09586
16	32	92	16	4	09587
17	32	92	16	4	09588
18	32	92	16	4	09589
20	38	104	20	4	09590
22	38	104	20	5	09591
24	45	121	25	5	09592
25	45	121	25	5	09593
26	45	121	25	5	09594
28	45	121	25	5	09595
30	45	121	25	5	09596
32	53	133	32	6	09597

TEKNİK ÖZELLİKLERİ:



Düşük ve orta dayanımlı malzemelerin (700 MPa'a kadar) kaba operasyonları için kullanılır
Yüzey kalitesi Ra 12,5 ve daha yüksek



Yüksek hız çeliği
%8 kobaltlı

KULLANIM ALANI

- Alaşimsız çelikler (180 HB)
- Yapı çelikleri (Sertlik:24 Hrc)
- Semantasyon nitrürasyon çelikleri (Sertlik:27,1 Hrc)
- Dökme demir (Max.240 HB)
- Korozyona ve asite dayanıklı çelikler (Sertlik:24,8 Hrc)